


5 and 6-Wire *minifast*® Receptacles, Front Mount, 1/2-14 NPT Threads

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection
- 600 V, 9 A



Drawing Number	Part Number	Lead Specs.	Features	Pinout
 <p>RSF ../NPT</p>	RSF 50-*M/NPT	UL, CSA 5x18 AWG 105°C	1/2-14NPT Threads, Standard Duty	1. BK 2. BU 3. GN/YE 4. BN 5. WH
	RSF 511-*M/NPT	UL, CSA 5x18 AWG 105°C	Automotive Color Code 1/2-14NPT Threads	1. RD/WH 2. RD/BU 3. GN 4. RD/OG 5. RD/BK
	RSF 55-*M/NPT	UL, CSA 5x16 AWG 105°C	Automotive Color Code 1/2-14NPT Threads	
	RSF 56-*M/NPT	UL, CSA 5x16 AWG 105°C	1/2-14NPT Threads, Heavy Duty	1. WH 2. RD 3. GN 4. OG 5. BK
	RSF 58-*M/NPT	UL, CSA 5x18 AWG 105°C 300 V, 9 A		
	RSF 61-*M/NPT	UL, CSA 6x18 AWG 105°C	1/2-14NPT Threads, Standard Duty	1. GN 2. WH 3. BU 4. GY 5. YE 6. BN
	RSF 66-*M/NPT	UL, CSA 6x16 AWG 105°C	1/2-14NPT Threads, Heavy Duty	1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	RSF 68-*M/NPT	UL, CSA 6x18 AWG 105°C 600 V, 9 A		

See page E59 for dimensional drawings.

Standard lead length is 0.3 Meters. Consult factory for other lengths.


Receptacles require a 13/16" (21 mm) clearance hole for panel mounting.

Standard housing material is nickel plated cast zinc. "RSF .."; "RSFV .." indicates 316 stainless steel housing.

For locknuts to be included, add "W/LN" to the end of the part number.


To specify PVC jacketed cable, add "/S717" to the end of the part number.

minifast® Standard Male Receptacles NPSM and NPT

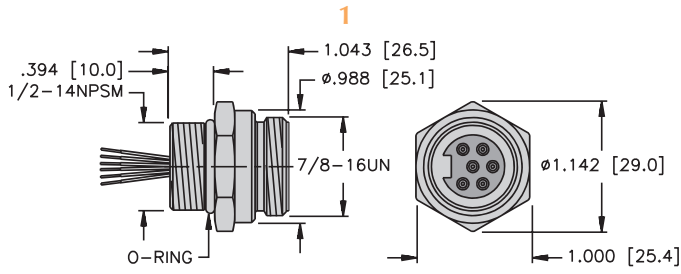

RSF ..


Page E63 - E66

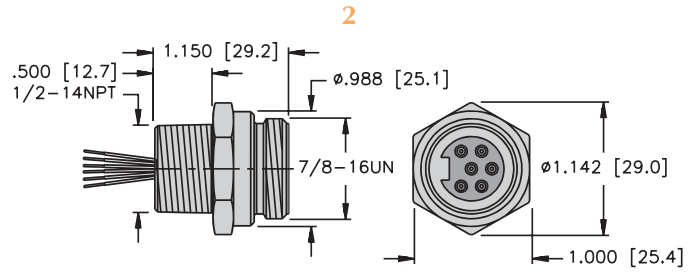

RSF ..NPT


Page E71 - E73

minifast® "B" Style Male Receptacles 1/2-14NPT and 3/4-14NPT

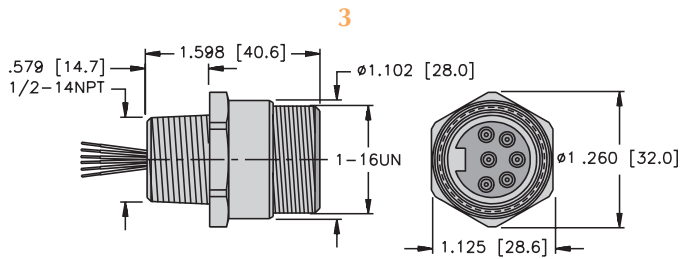

"B" Style RSF ..1/2-14NPT


Page E76

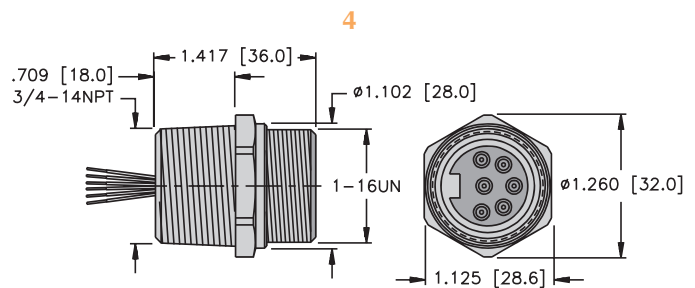

"B" Style RSF ..3/4-14NPT


Page E76

minifast® "C" Style Female Receptacles 1/2-14NPT and 3/4-14NPT

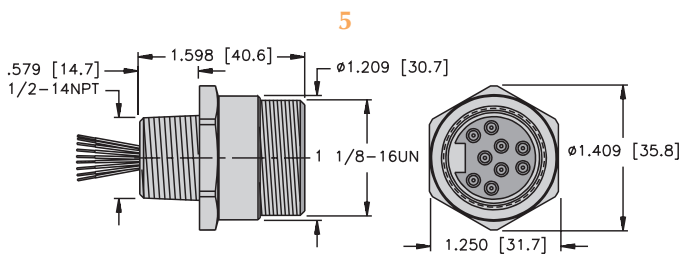

"C" Style RSF ..1/2-14NPT

Page E77

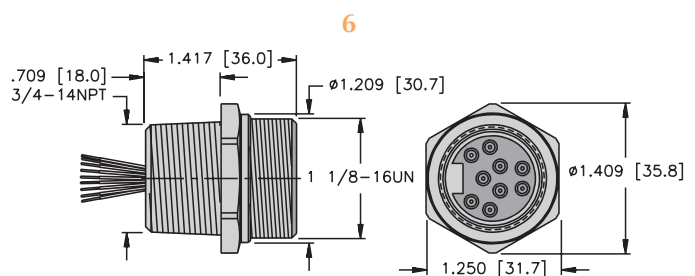

"C" Style RSF ..3/4-14NPT

Page E77